


Installation recommendation

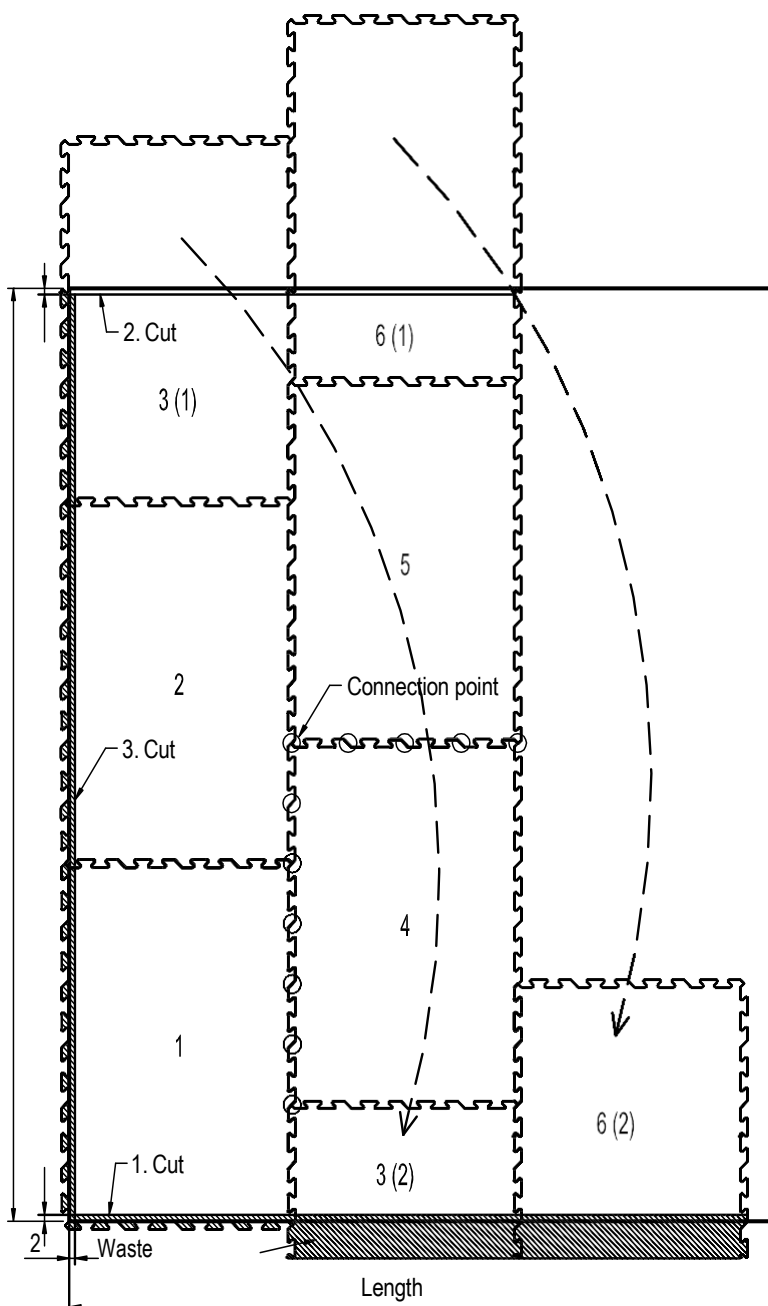

Cross connection

The puzzle connection offers 6 connection points on the long side and 4 connection points on the wide side of the mat.

Due to the sluggish laying (the next series of mats has to be started with the section from the previous row), the cross-connection produces minimal waste. If there is no section from the previous row, the next row should begin with half a mat.

In order to obtain a usable section from the 1st row of mats, the cuts must be in the order shown.

Wall clearance

Rubber expands through use and warming. No or small wall spacing can lead to the formation of waves and re-installation (e.g. after cleaning) becomes considerably more difficult or impossible. Depending on laying temperature and use a wall distance of app. 0,5 – 2% is recommended.

Laying

- On concrete or asphalt with a flat surface or with cement with a cement-bound split plan
- The temperature of the mats must be at least + 5°C during installation
- The mats are laid floating and not bolted
- Use a carpet knife, a jig saw or a circular saw for cutting